


## Allgemeine Information

## Innen - Wandleuchten



|               |                   |
|---------------|-------------------|
| Ean           | 8021696121130     |
| Artikel       | BOW AP D76 OTTONE |
| Installation  | Wandleuchten      |
| Garantie      | 5 years           |
| Bruttogewicht | 1.12 kg           |
| Volumen       | 0.032725 m³       |

## Technische Information

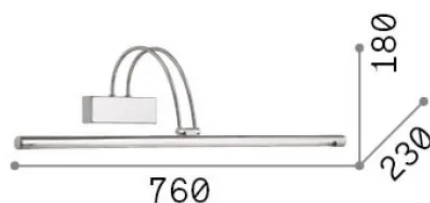

|                    |                                                                                |
|--------------------|--------------------------------------------------------------------------------|
| Nettogewicht       | 0.86 kg                                                                        |
| Isolationsklasse   | I                                                                              |
| Schutzindex        | IP20                                                                           |
| Einhaltung         | CE                                                                             |
| Betriebstemperatur | 0° ~ +40 °C                                                                    |
| Dimmer             | Non-dimmable, On-Off                                                           |
| Leistung           | 220-240 V AC 50/60 Hz                                                          |
| Energieversorgung  | In-built, included<br>Replaceable (by qualified operators only),<br>electronic |

## Quellinfo

|                       |                                           |
|-----------------------|-------------------------------------------|
| Integrierte Quelle    | Integrated LED module                     |
| Austauschbare Quelle  | Replaceable (by qualified operators only) |
| Leistung              | LED 8 W                                   |
| Emissionen            | Direct                                    |
| Maximaler Verbrauch   | max 8 W                                   |
| Merkmale LED          | LED SMD                                   |
| CCT LED               | 3000 K                                    |
| Dauer LED (t. 25°C)   | 20000 h                                   |
| CRI                   | > 90                                      |
| SDCM                  | 3                                         |
| Lichtstrahlwinkel     | 110°                                      |
| Lichtstrahlfluss      | 1050 lm                                   |
| Nützlicher Lichtstrom | 710 lm                                    |