


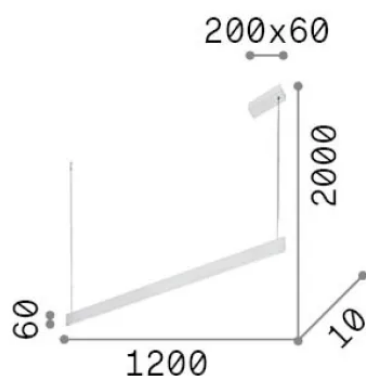

## Allgemeine Information

### Innen - Systeme

|               |                    |
|---------------|--------------------|
| Ean           | 8021696336190      |
| Artikel       | DESK WIDE SP2 NERO |
| Installation  | Systeme            |
| Garantie      | 5 years            |
| Bruttogewicht | 2 kg               |
| Volumen       | 0.00941 m³         |

## Technische Information

|                    |                                                                                |
|--------------------|--------------------------------------------------------------------------------|
| Nettogewicht       | 1.8 kg                                                                         |
| Isolationsklasse   | II                                                                             |
| Schutzindex        | IP20                                                                           |
| Einhaltung         | CE                                                                             |
| Betriebstemperatur | 0° ~ +40 °C                                                                    |
| Dimmer             | Non-dimmable, On-Off                                                           |
| Leistung           | 220-240 V AC 50/60 Hz                                                          |
| Energieversorgung  | In-built, included<br>Replaceable (by qualified operators only),<br>electronic |

## Quellinfo

|                          |                       |
|--------------------------|-----------------------|
| Integrierte Quelle       | Integrated LED module |
| Austauschbare Quelle     | No                    |
| Leistung                 | LED 36 W              |
| Emissionen               | Direct + Indirect     |
| Maximaler Verbrauch      | max 36 W              |
| Merkmale LED             | LED SMD               |
| CCT LED                  | 3000 K                |
| Dauer LED (t. 25°C)      | 30000 h               |
| CRI                      | > 90                  |
| SDCM                     | 3                     |
| Lichtstrahlwinkel        | 71+71°                |
| Lichtstrahlfluss         | 4000 lm               |
| Nützlicher Lichtstrom    | 1920 lm               |
| Photobiologisches Risiko | EXEMPT                |