


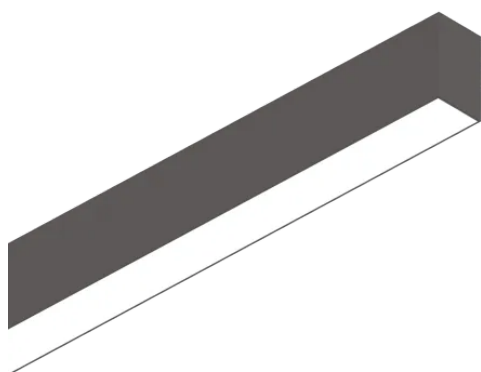

Allgemeine Information

Technisch - Systeme

Ean	8021696192710
Artikel	FLUO BI-EMISSION 1200 3000K BK
Installation	Systeme
Garantie	5 years
Bruttogewicht	4.88 kg
Volumen	0.018311 m³

Technische Information

Nettogewicht	2.89 kg
Isolationsklasse	I
Schutzindex	IP20
Einhaltung	CE
Betriebstemperatur	0° ~ +40 °C
Dimmer	Non-dimmable, On-Off
Leistung	220-240 V AC 50/60 Hz
Energieversorgung	In-built, included Replaceable (by qualified operators only), electronic, tridonic
Zubehör nicht inklusive	Mounting kit (suspension), Dimmable drivers kit, Structure connector



Quellinfo

Integrierte Quelle	Integrated LED module
Austauschbare Quelle	No
Leistung	40 W
Emissionen	Direct + Indirect
Maximaler Verbrauch	max 40 W
Merkmale LED	LED SMD SAMSUNG
CCT LED	3000 K
Dauer LED (t. 25°C)	50000 h
CRI	> 90
SDCM	3
Lichtstrahlwinkel	105+105°
Lichtstrahlfluss	5500 lm
Nützlicher Lichtstrom	3820 lm
Photobiologisches Risiko	1