


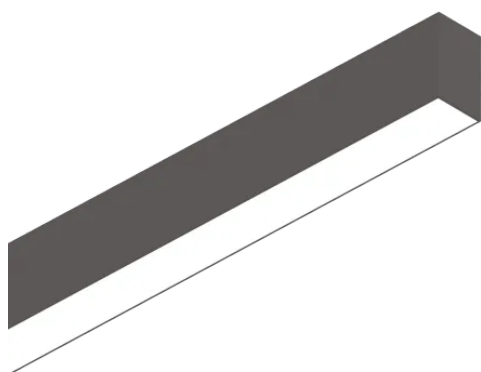

## Allgemeine Information

### Technisch - Systeme

|               |                         |
|---------------|-------------------------|
| Ean           | 8021696192628           |
| Artikel       | FLUO WIDE 1800 4000K BK |
| Installation  | Systeme                 |
| Garantie      | 5 years                 |
| Bruttogewicht | 6.64 kg                 |
| Volumen       | 0.0403 m <sup>3</sup>   |

## Technische Information

|                         |                                                                                                           |
|-------------------------|-----------------------------------------------------------------------------------------------------------|
| Nettogewicht            | 4.42 kg                                                                                                   |
| Isolationsklasse        | I                                                                                                         |
| Schutzindex             | IP20                                                                                                      |
| Einhaltung              | CE                                                                                                        |
| Betriebstemperatur      | 0° ~ +40 °C                                                                                               |
| Dimmer                  | Non-dimmable, On-Off                                                                                      |
| Leistung                | 220-240 V AC 50/60 Hz                                                                                     |
| Energieversorgung       | In-built, included<br>Replaceable (by qualified operators only),<br>electronic, tridonic                  |
| Zubehör nicht inklusive | Mounting kit (suspension, recessed, surface),<br>Dimmable driver, Luminous corner, Structure<br>connector |



## Quellinfo

|                          |                                           |
|--------------------------|-------------------------------------------|
| Integrierte Quelle       | Integrated LED module                     |
| Austauschbare Quelle     | Replaceable (by qualified operators only) |
| Leistung                 | 36 W                                      |
| Emissionen               | Direct                                    |
| Maximaler Verbrauch      | max 36 W                                  |
| Merkmale LED             | LED SMD SAMSUNG                           |
| CCT LED                  | 4000 K                                    |
| Dauer LED (t. 25°C)      | 50000 h                                   |
| CRI                      | > 90                                      |
| SDCM                     | 3                                         |
| Lichtstrahlwinkel        | 105°                                      |
| Lichtstrahlfluss         | 5200 lm                                   |
| Nützlicher Lichtstrom    | 3450 lm                                   |
| Photobiologisches Risiko | 1                                         |