


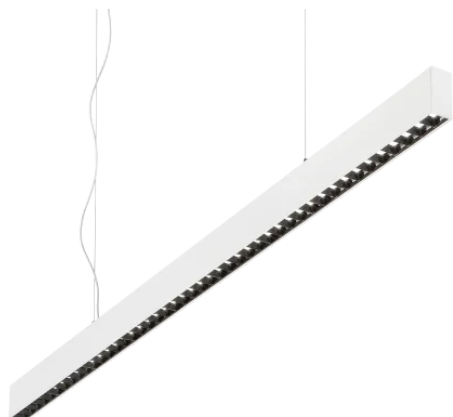


## Allgemeine Information

### Technisch - Systeme

|               |                    |
|---------------|--------------------|
| Ean           | 8021696271194      |
| Artikel       | OFFICE SP 3000K WH |
| Installation  | Systeme            |
| Garantie      | 5 years            |
| Bruttogewicht | 1.86 kg            |
| Volumen       | 0.004128 m³        |

## Technische Information

|                    |                                                                                |
|--------------------|--------------------------------------------------------------------------------|
| Nettogewicht       | 1.82 kg                                                                        |
| Isolationsklasse   | I                                                                              |
| Schutzindex        | IP20                                                                           |
| Einhaltung         | CE                                                                             |
| Betriebstemperatur | 0° ~ +40 °C                                                                    |
| Dimmer             | Non-dimmable, On-Off                                                           |
| Leistung           | 220-240 V AC 50/60 Hz                                                          |
| Energieversorgung  | In-built, included<br>Replaceable (by qualified operators only),<br>electronic |
| Lastwiderstand     | IK06                                                                           |

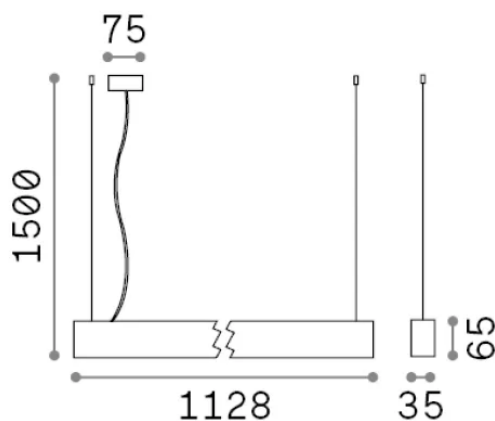

## Quellinfo

|                       |                                           |
|-----------------------|-------------------------------------------|
| Integrierte Quelle    | Integrated LED module                     |
| Austauschbare Quelle  | Replaceable (by qualified operators only) |
| Leistung              | 30 W                                      |
| Emissionen            | Direct                                    |
| Maximaler Verbrauch   | max 30 W                                  |
| Merkmale LED          | LED SMD                                   |
| CCT LED               | 3000 K                                    |
| Dauer LED (t. 25°C)   | 50000 h                                   |
| CRI                   | > 90                                      |
| SDCM                  | 3                                         |
| Lichtstrahlwinkel     | 37°                                       |
| UGR Maximal           | < 16                                      |
| Lichtstrahlfluss      | 3550 lm                                   |
| Nützlicher Lichtstrom | 2590 lm                                   |