


## Allgemeine Information

## Technisch - Strahler und Schienen

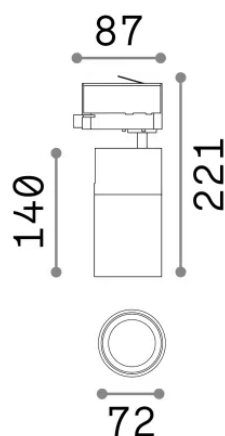

|               |                                            |
|---------------|--------------------------------------------|
| Ean           | 8021696247939                              |
| Artikel       | QUICK TR 3-PHASE 21W CRI80 3000K ON-OFF BK |
| Installation  | Strahler und Schienen                      |
| Garantie      | 5 years                                    |
| Bruttogewicht | 0.96 kg                                    |
| Volumen       | 0.00378 m <sup>3</sup>                     |

## Technische Information

|                         |                                                                                              |
|-------------------------|----------------------------------------------------------------------------------------------|
| Nettogewicht            | 0.76 kg                                                                                      |
| Isolationsklasse        | I                                                                                            |
| Schutzindex             | IP20                                                                                         |
| Einhaltung              | CE                                                                                           |
| Betriebstemperatur      | 0° ~ +40 °C                                                                                  |
| Dimmer                  | Non-dimmable, On-Off                                                                         |
| Leistung                | 220-240 V AC 50/60 Hz                                                                        |
| Energieversorgung       | In-built, included<br>Replaceable (by qualified operators only),<br>electronic, tridonic     |
| Zubehör nicht inklusive | Honeycomb filter, Narrow or wide beam lens,<br>Single connection on-off, Link on-off profile |

## Quellinfo

|                       |                                           |
|-----------------------|-------------------------------------------|
| Integrierte Quelle    | Integrated LED module                     |
| Austauschbare Quelle  | Replaceable (by qualified operators only) |
| Leistung              | 21 W                                      |
| Emissionen            | Direct                                    |
| Maximaler Verbrauch   | max 21 W                                  |
| Merkmale LED          | LED COB CITIZEN                           |
| CCT LED               | 3000 K                                    |
| Dauer LED (t. 25°C)   | 50000 h                                   |
| CRI                   | > 80                                      |
| SDCM                  | 3                                         |
| Lichtstrahlwinkel     | 30°                                       |
| Lichtstrahlfluss      | 2450 lm                                   |
| Nützlicher Lichtstrom | 2160 lm                                   |