


Allgemeine Information

Technisch - Strahler und Schienen

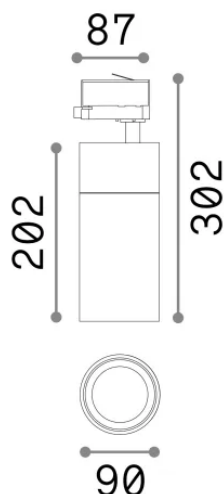

Ean	8021696222684
Artikel	QUICK TR 3-PHASE 28W CRI90 4000K ON-OFF BK
Installation	Strahler und Schienen
Garantie	5 years
Bruttogewicht	1.48 kg
Volumen	0.00588 m ³

Technische Information

Nettogewicht	1.2 kg
Isolationsklasse	I
Schutzindex	IP20
Einhaltung	CE
Betriebstemperatur	0° ~ +40 °C
Dimmer	Non-dimmable, On-Off
Leistung	220-240 V AC 50/60 Hz
Energieversorgung	In-built, included Replaceable (by qualified operators only), electronic, tridonic
Zubehör nicht inklusive	Honeycomb filter, Narrow or wide beam lens, Single connection on-off, Link on-off profile

Quellinfo

Integrierte Quelle	Integrated LED module
Austauschbare Quelle	Replaceable (by qualified operators only)
Leistung	28 W
Emissionen	Direct
Maximaler Verbrauch	max 28 W
Merkmale LED	LED COB CITIZEN
CCT LED	4000 K
Dauer LED (t. 25°C)	50000 h
CRI	> 90
SDCM	3
Lichtstrahlwinkel	30°
Lichtstrahlfluss	2750 lm
Nützlicher Lichtstrom	2420 lm