

## Allgemeine Information


## Aussen - Wandleuchten



|               |                        |
|---------------|------------------------|
| Ean           | 8021696307176          |
| Artikel       | SWIPE AP SENSOR COFFEE |
| Installation  | Wandleuchten           |
| Garantie      | 5 years                |
| Bruttogewicht | 1.41 kg                |
| Volumen       | 0.005681 m³            |

## Technische Information

|                    |                                                                                |
|--------------------|--------------------------------------------------------------------------------|
| Nettogewicht       | 1.3 kg                                                                         |
| Isolationsklasse   | I                                                                              |
| Schutzindex        | IP54                                                                           |
| Einhaltung         | CE                                                                             |
| Betriebstemperatur | -15° ~ +45 °C                                                                  |
| Dimmer             | Non-dimmable, On-Off, PIR Motion Sensor                                        |
| Leistung           | 220-240 V AC 50/60 Hz                                                          |
| Energieversorgung  | In-built, included<br>Replaceable (by qualified operators only),<br>electronic |

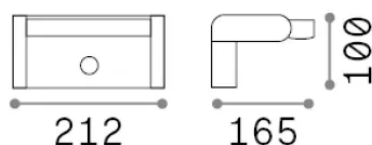

## Quellinfo

|                          |                       |
|--------------------------|-----------------------|
| Integrierte Quelle       | Integrated LED module |
| Austauschbare Quelle     | No                    |
| Leistung                 | LED 21 W              |
| Emissionen               | Direct                |
| Maximaler Verbrauch      | max 21 W              |
| Merkmale LED             | LED SMD               |
| CCT LED                  | 3000 K                |
| Dauer LED (t. 25°C)      | 50000 h               |
| CRI                      | > 90                  |
| SDCM                     | 3                     |
| Lichtstrahlwinkel        | 105°                  |
| Lichtstrahlfluss         | 2300 lm               |
| Nützlicher Lichtstrom    | 1390 lm               |
| Photobiologisches Risiko | 1                     |
| Standby-Leistung         | < 0.50 W              |