


General info

Technical - Systems

Ean	8021696191997
Item	FLUO WIDE 1200 3000K BK
Installation	Systems
Warranty	5 years
Gross weight	4.88 kg
Volume	0.02064 m ³

Technical info

Net weight	2.89 kg
Insulation class	I
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Dimmer	Non-dimmable, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included Replaceable (by qualified operators only), electronic, tridonic
Accessories not included	Mounting kit (suspension, recessed, surface), Dimmable driver, Luminous corner, Structure connector

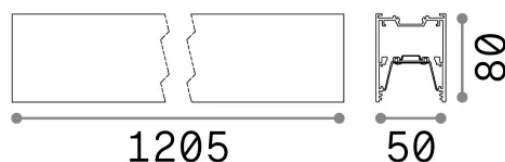

Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	27 W
Emission	Direct
Max consupcion	max 27 W
Features LED	LED SMD SAMSUNG
CCT LED	3000 K
Duration LED (t. 25°C)	50000 h
CRI	> 90
SDCM	3
Light beam	105°
Light beam flux	3250 lm
Useful light flux	2430 lm
Photobiological risk	1