

## General info


## Technical - Recessed lights



|              |                                 |
|--------------|---------------------------------|
| Ean          | 8021696267975                   |
| Item         | GAME TRIM ROUND 11W 4000K WH WH |
| Installation | Recessed lights                 |
| Warranty     | 5 years                         |
| Gross weight | 0.4 kg                          |
| Volume       | 0.001573 m³                     |

## Technical info

|                          |  |
|--------------------------|--|
| Net weight               | 0.35 kg  |
| Insulation class         | II   |
| Protection index         | IP20   |
| Compliance               | CE   |
| Operating temperature    | 0° ~ +40 °C [DO NOT COVER]   |
| Dimmer                   | Non-dimmable, On-Off   |
| Power output             | 220-240 V AC 50/60 Hz  |
| Power supply             | Separate, included<br>Replaceable (by qualified operators only),<br>electronic |
| Load resistance          | IK06   |
| Front protection index   | IP40   |
| Accessories not included | Dimmable driver  |

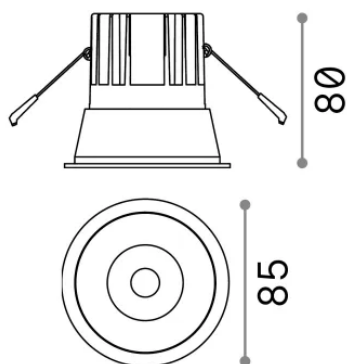

## Source info

|                        |   |
|------------------------|---|
| Integrated source      | Integrated LED module                     |
| Replaceable source     | Replaceable (by qualified operators only) |
| Power                  | 11 W                                      |
| Emission               | Direct                                    |
| Max consupcion         | max 11 W                                  |
| Features LED           | LED COB CREE                              |
| CCT LED                | 4000 K                                    |
| Duration LED (t. 25°C) | 50000 h                                   |
| CRI                    | > 90                                      |
| SDCM                   | 3   |
| Light beam             | 36°                                       |
| UGR Maximum            | < 19                                      |
| Light beam flux        | 1100 lm                                   |
| Useful light flux      | 880 lm                                    |
| Photobiological risk   | 2   |