

General info


Technical - Recessed lights



Ean	8021696341712
Item	LIKA FI SLIM 20W 4000K WH
Installation	Recessed lights
Warranty	5 years
Gross weight	0.39 kg
Volume	0.00221 m³

Technical info

Net weight	0.3 kg
Insulation class	II
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C [DO NOT COVER]
Dimmer	Non-dimmable, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	Separate, included Replaceable (by qualified operators only), electronic

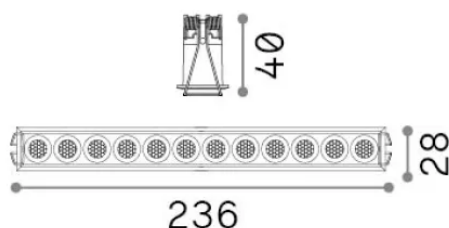

Source info

Integrated source	Integrated LED module
Replaceable source	No
Power	20 W
Emission	Direct
Max consupcion	max 20 W
Features LED	LED SMD BRIDGELUX
CCT LED	4000 K
Duration LED (t. 25°C)	50000 h
CRI	> 90
SDCM	3
Light beam	32°
UGR Maximum	< 19
Light beam flux	2100 lm
Useful light flux	1740 lm
Photobiological risk	2