


## General info

## Technical - Spotlights and Tracks

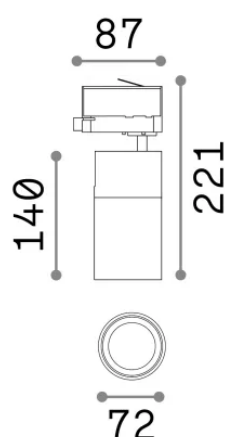

|              |  |
|--------------|--|
| Ean          | 8021696222523                              |
| Item         | QUICK TR 3-PHASE 15W CRI80 3000K ON-OFF BK |
| Installation | Spotlights and Tracks                      |
| Warranty     | 5 years                                    |
| Gross weight | 0.96 kg                                    |
| Volume       | 0.00153 m <sup>3</sup>                     |

## Technical info

|                          |  |
|--------------------------|--|
| Net weight               | 0.76 kg  |
| Insulation class         | I  |
| Protection index         | IP20   |
| Compliance               | CE   |
| Operating temperature    | 0° ~ +40 °C  |
| Dimmer                   | Non-dimmable, On-Off   |
| Power output             | 220-240 V AC 50/60 Hz  |
| Power supply             | In-built, included<br>Replaceable (by qualified operators only),<br>electronic, tridonic     |
| Accessories not included | Honeycomb filter, Narrow or wide beam lens,<br>Single connection on-off, Link on-off profile |

## Source info

|                        |   |
|------------------------|---|
| Integrated source      | Integrated LED module                     |
| Replaceable source     | Replaceable (by qualified operators only) |
| Power                  | 15 W                                      |
| Emission               | Direct                                    |
| Max consupcion         | max 15 W                                  |
| Features LED           | LED COB CITIZEN                           |
| CCT LED                | 3000 K                                    |
| Duration LED (t. 25°C) | 50000 h                                   |
| CRI                    | > 80                                      |
| SDCM                   | 3   |
| Light beam             | 30°                                       |
| Light beam flux        | 1800 lm                                   |
| Useful light flux      | 1520 lm                                   |